

Industrial Display Systems

Leading Professional Display Expert

- ✓ Leading Technology and Capability
- ✓ Product Offerings
- ✓ Design To Order Service
- ✓ Market Solutions
- ✓ Product Selection





ADVANTECH

Enabling an Intelligent Planet

www.advantech.com


Advantech Industrial Display Systems

Advantech designs, develops and manufactures display systems that meet the demands of industrial display markets in gaming, transportation, medical, and many system integration markets globally. Combining proven technologies and flexible manufacturing, Advantech creates class leading solutions for your customers that deliver significant product differentiation and competitive advantage. Our customer-centric approach reinforces all of our activities and in an essential part of the thousands of products we ship daily.

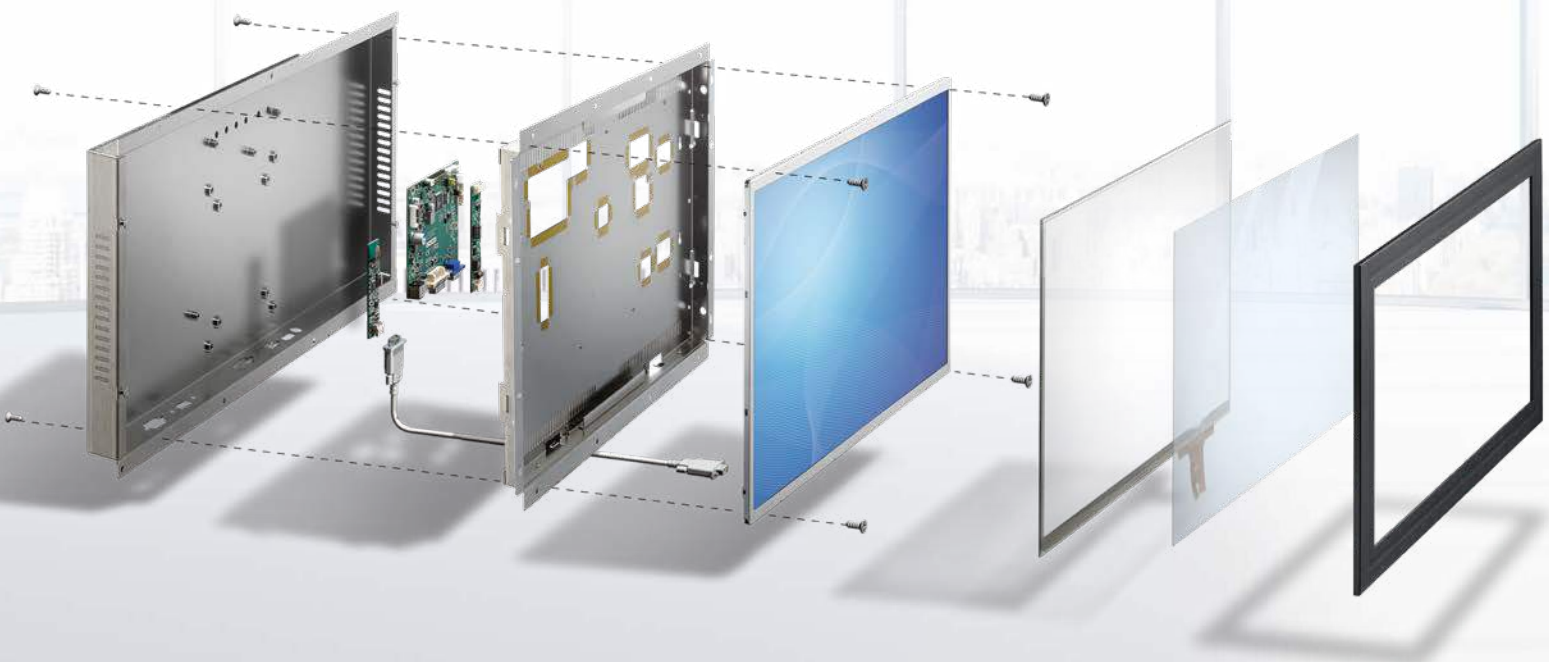

Optical Bonding

Optical bonding technology is to inject optical glue into the space between a cover glass/ a touch screen and the LCD panel to enhance the readability and durability. Advantech develops both Wet Bond and Dry Bond technologies for customers' different needs using proprietary materials and process in house in Taiwan and USA.

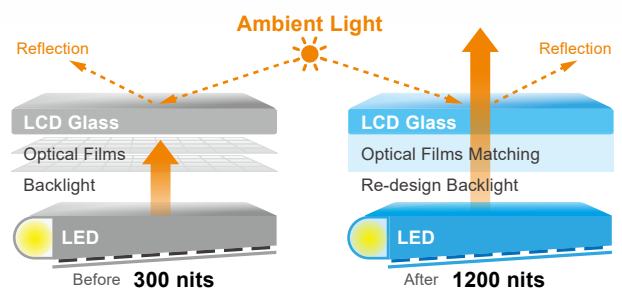

High Brightness

To withstand strong ambient light in the external environment, high brightness solution is required. With in-house LED light bar design and optical films, our solution can boost brightness up to 2000 nits with a low-power backlight source saving about 20% less energy than competing products with the same level of brightness.

In-house Design and Manufacturing Capabilities

Advantech is committed to developing new industrial display technologies and has built class 1,000/10,000 LCD clean rooms with ISO certification to develop our own display technologies in Taiwan, China Kunshan and North America. With monthly capacities of 30,000 pieces and all capabilities in-house, we bring high add-on value, quality and reliability to our industrial display products.



Class 10,000 Clean-room




Professional Engineers



Value-added Services



Assured Quality

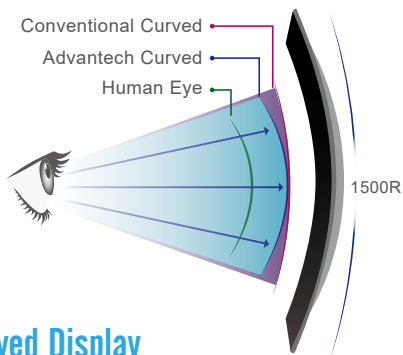

Curved Display

Advantech curved display technology is available with a variety of radius of concave or convex surface such as 1500R or 800R to create a comfortable and immersive viewing experience. Packaged together with an industrial grade video card and power supply, our solution is available with standard video inputs and can be specified with or without 10-point-touch overlay.



Medical Imaging

Medical imaging applications require highly consistent image reproduction. Our solutions cover panels, AD boards and open frame monitors with color management functions which help improve brightness stability, gray scale, color temperature and color gamut and are fully compliant with the DICOM standard.

Indoor/ Outdoor Industrial LCD Kits

IDK Series

Advantech Industrial Display Kit series provide LCD panels, outdoor LCD panels and touchscreen displays which support sunlight readable, resistive and projected capacitive touch and are proven to work with all Advantech embedded platforms.

Indoor Display Kits IDK-1000

- 5.7"~21.5" options
- Indoor applications
- LVDS signal interface



- Resistive and P-cap touch
- Wide viewing angle

Outdoor High Bright Display Kits IDK-2000

- 8.4"~21.5" options
- Outdoor applications
- LVDS signal interface
- Resistive touch
- Wide viewing angle



Key Features



Proven Compatibility

All Advantech IDK series are tested to be compatible with all Advantech embedded boards with LVDS cables, ready VBIOS and touch driver support.



Enhanced Readability

IDK-2000 provides 1200 cd/m² brightness to withstand the ambient sunlight (normally 10,000 nits) and guarantees excellent visibility with low power consumption.



User-friendly Interface

IDK series is pre-integrated with touchscreen to deliver user-friendly interface with both single/multi touch options.

Open Frame/ Panel Mount/ IP65 Monitors

IDS Series

Advantech provides comprehensive monitor solutions with different front frame chassis options. Customers can choose based on their integration needs. All the industrial grade monitors are featured with slim and light design for easy and efficient installations.

Open Frame Monitors IDS-3100



- 6.5"~21.5" options
- Integrated bracket
- Dual VGA/DVI interface
- P-cap/resistive/ non-touch options
- Rear/VESA mount

Panel Mount Monitors IDS-3200



- 6.5"~21.5" options
- Rugged metal front frame
- Dual VGA/DVI interface
- P-cap/resistive/ non-touch options
- Front/VESA mount

IP65 Monitors IDS-3300



- 15"~21.5" options
- IP65 rated front frame
- Dual VGA/DVI interface
- P-cap/resistive/ non-touch options
- Front/VESA mount

Key Features



Ultra-slim Design

Featuring an ultra-slim and compact profile, the Advantech IDS monitors measure 20% less than market average for easy integration



Flexible Mount

IDS-3000 series support flexible rear/ front/ wall/ stand mount with VESA mounting interface standard.



Dust/Humidity Protection(IP65)

IDS-3300 Series are designed with IP65 certified enclosures to ensure stable operation in harsh environments.

Proflat Monitors/ Digital Signage Displays/ Curved Displays

Advantech provides stand-alone solutions in different formats such as truly-flat monitors, large format monitors, ultra wide monitors and curved displays. These displays are built to meet all professional applications such as medical, transportation and gaming markets and provide a plug and play solutions.

Proflat Monitors IDP31



- 15", 21.5" size options
- 100% flat glass front
- HDMI/VGA/DVI
- Stand/wall mount
- 10 multi-touch points

Curved Monitors CRV



- 43" with 1500R or 800R options
- Wide viewing angle
- P-cap touch up to 10 multi-touch points
- HDMI/VGA/DisplayPort
- VESA mount

Signage Displays DSD-3000/ DSD-5000



- 32", 42", 55" / 28", 38" size options
- Fanless design
- Wide viewing angle
- DVI/VGA
- VESA/wall mount

Key Features



Portrait & Landscape Modes

Our monitors enable you to display content in both portrait and landscape modes.




Super Wide Ratio

DSD-5000 series allows for maximize available space and dynamic scenarios with ultra wide ratio design.



Triptic™ Function Built-in

CRV series is built-in with Triptics which allows customers to define their user zones on CRV up to 3 inputs via HDMI and Display Port without the need for changes to game software.

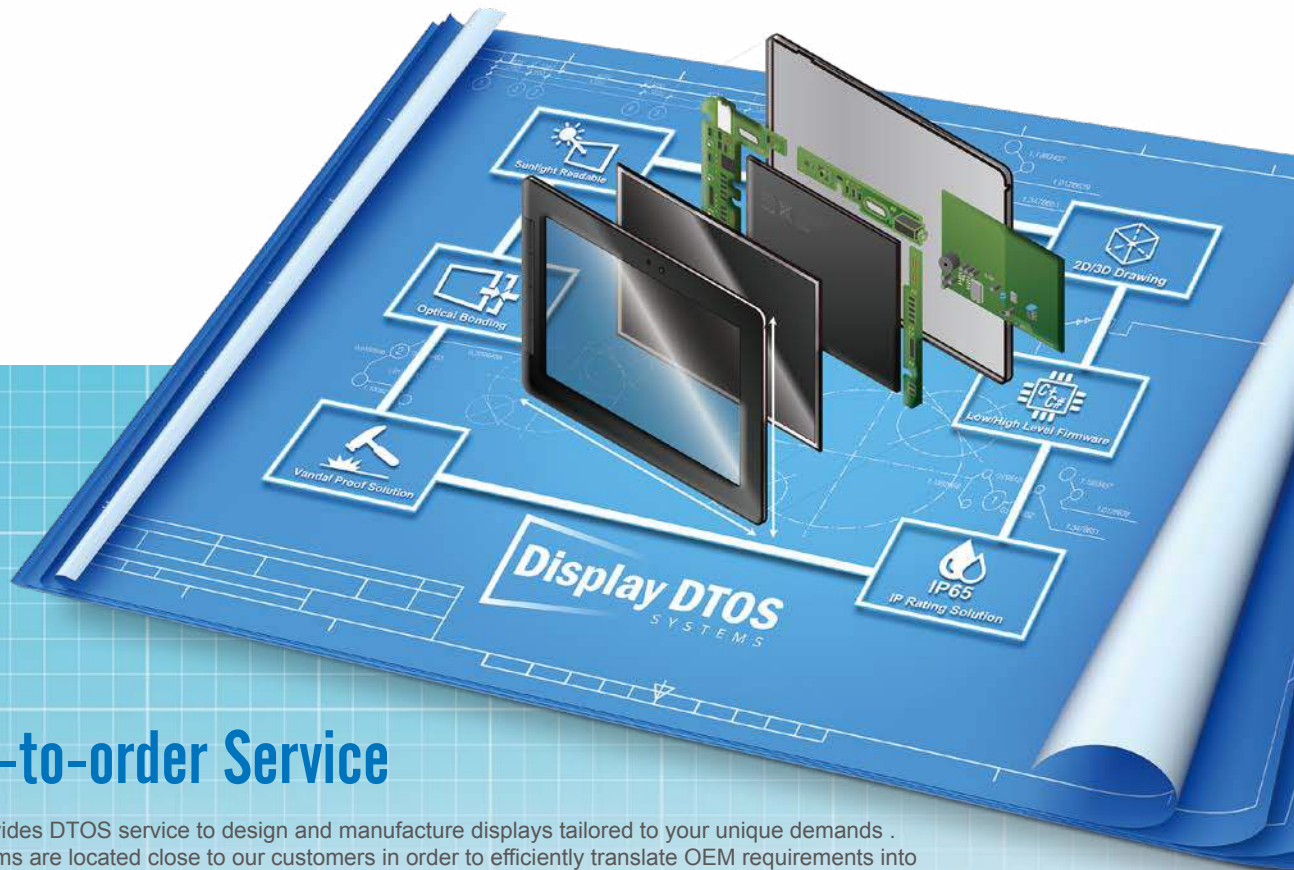

Design-to-order Service

Advantech provides DTOS service to design and manufacture displays tailored to your unique demands. Our design teams are located close to our customers in order to efficiently translate OEM requirements into cost effective, cleverly engineered solutions for all manner of environments.



Optical Engineering

- Backlight design
- Optical bonding
- Brightness enhancement
- Thermal control



Mechanical/ Material Engineering

- Chassis, glass, polymers, adhesives, light guides
- Open, Closed Frame, Proflat designs
- Panel cutting
- IP54/IP65 solution



System Integration Service

- X86/RISC computing
- Touchscreen/button integration
- BIOS customization

Key Applications

Our teams develop hundreds of new designs each year and are veterans of many demanding applications such as:



Transportation

- Ticketing kiosk
- Passenger information signage
- Marine



Medical Ultrasonic

- Ultrasound
- Clinical equipment
- Surgical imaging



Drive Thru

- Quick service kiosk
- Outdoor digital signage



Vending Machine

- Point of sales
- Digital signage

Focused Applications

Outdoor Kiosk

Designed with ruggedness and longevity in mind, our outdoor display solutions provide an reliable alternative to off the shelf monitors. Built with our LCD optical enhancement solutions, wide temperature design, and robust touch input, our large range of sizes and configurations meet all demands in this area.

Applications

Gas stations, bike rental systems, outdoor ATMs/payment terminals, parking lots.

Suitable Solutions

IDK-2000, IDS-3000 series, optical bonding, high brightness



Transportation

Nowadays, displays are ubiquitous in transportation applications. Advantech provides comprehensive display systems for transportation markets such as for rail, airport, marine, and busses. Transportation displays usually require specific features such as wide view angles, high brightness, wide temperature and ruggedness to fit into these diverse environments.

Applications

Passenger information systems, train/marine control systems, taxi advertising screen, in-flight entertainment systems

Suitable Solutions

IDS-3000 series, DSD-5000 series, optical bonding, high brightness



Gaming


Designed exclusively for gaming applications, our gaming display solutions provide a wide range of gaming monitors to meet the special requirements of applications. These display solutions feature widescreens, reliable touch screens and flexible mechanical designs that can be integrated with Advantech gaming platforms for a total gaming solution.

Applications

Slot machines, lottery terminals, jackpot systems

Suitable Solutions

Main display- CRV-430WP, IDS-3121, IDS-3119
Button deck / Player tracker- DSD-5000 series

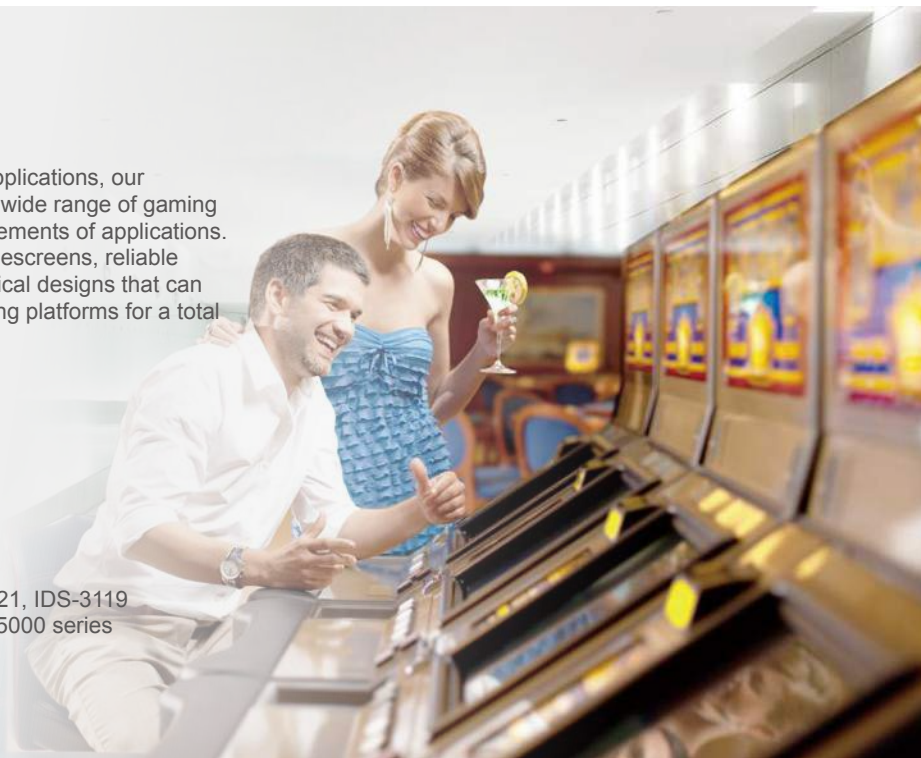

Medical Imaging

Medical imaging applications require highly consistent image reproduction. Advantech provides sophisticated medical display solutions that can help improve performance and diagnostic accuracy. All of our displays are designed with IPS technology and fully compliant with the DICOM standard for image communication and image file formats.

Applications

Ultrasound, clinical and surgical

Suitable Solutions

IDK-1115, IDK-1121, IDS-3110, IDS-3121,
optical bonding, medical AD board



Selection Guide

Industrial Display Kit IDK-1000 Series

| | IDK-1105 | IDK-065 | IDK-1107W | | | IDK-1108 | IDK-1110W | | IDK-1110 | |
|-----------------------|------------------|------------------|------------------|--------------------|--------------------|------------------|--------------------|-------------------|------------------|------------------|
| Size | 5.7" | 6.5" | 7" | | | 8.4" | 10.1" | | 10.4" | |
| Resolution | 640 x 480 (VGA) | 640 x 480 (VGA) | 800 x 480 (WVGA) | 1024 x 600 (WSVGA) | 1024 x 600 (WSVGA) | 800 x 600 (SVGA) | 1024 x 600 (WSVGA) | 1280 x 800 (WXGA) | 800 x 600 (SVGA) | 1024 x 768 (XGA) |
| Brightness (cd/m²) | 500 | 800 | 400 | 400 | 500 | 450 | 550 | 500 | 400 | 500 |
| Viewing Angle (H/V°) | 140/100 | 160/140 | 160/160 | 150/145 | 140/120 | 160/140 | 120/140 | 170/170 | 160/130 | 176/176 |
| Contrast Ratio | 250:1 | 600:1 | 750:1 | 700:1 | 600:1 | 600:1 | 500:1 | 800:1 | 700:1 | 1000:1 |
| Touchscreen | 4-Wire Resistive | 4-Wire Resistive | 4-Wire Resistive | 4-Wire Resistive | P-cap | 4-Wire Resistive | 4-Wire Resistive | P-cap | 4-Wire Resistive | P-cap |
| Signal Interface | LVDS | LVDS | LVDS | LVDS | LVDS | LVDS | LVDS | LVDS | LVDS | LVDS |
| Backlight Life (hrs) | 30,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 |
| Durability (touches) | 1 million | 1 million | 1 million | 1 million | 50 million ~ | 1 million | 1 million | 50 million ~ | 1 million | 50 million ~ |
| Operating Temperature | -20 ~ 70°C | -10 ~ 60°C | -5 ~ 60°C | -20 ~ 70°C | -20 ~ 70°C | -10 ~ 60°C | -5 ~ 60°C | -20 ~ 65°C | -10 ~ 60°C | -20 ~ 70°C |

| | IDK-1112 | IDK-1115 | | IDK-1115WP | IDK-1119 | IDK-1121W | |
|-----------------------|------------------|------------------|------------------|-----------------|--------------------|-------------------|-------------------|
| Size | 12.1" | 15" | | 15.6" | 19" | 21.5" | |
| Resolution | 800 x 600 (SVGA) | 1024 x 768 (XGA) | 1024 x 768 (XGA) | 1366x768 (WXGA) | 1280 x 1024 (SXGA) | 1920 x 1080 (FHD) | 1920 x 1080 (FHD) |
| Brightness (cd/m²) | 450 | 400 | 500 | 500 | 350 | 300 | 250 |
| Viewing Angle (H/V°) | 160/140 | 160/140 | 178/178 | 160/150 | 170/160 | 178/178 | 178/178 |
| Contrast Ratio | 700:1 | 700:1 | 2500:1 | 600:1 | 1000:1 | 5000:1 | 1000:1 |
| Touchscreen | 5-Wire Resistive | 5-Wire Resistive | P-cap | P-cap | 5-Wire Resistive | 5-Wire Resistive | P-cap |
| Signal Interface | LVDS | LVDS | LVDS | LVDS | 2 Channel LVDS | 2 Channel LVDS | 2 Channel LVDS |
| Backlight Life (hrs) | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 30,000 |
| Durability (touches) | 10 million | 10 million | 50 million ~ | 50 million ~ | 10 million | 10 million | 50 million ~ |
| Operating Temperature | -20 ~ 70°C | -20 ~ 70°C | -20 ~ 70°C | -10 ~ 70°C | 0 ~ 50°C | 0 ~ 60°C | 0 ~ 50°C |

High Brightness Display Kit IDK-2000 Series

| | IDK-2108 | IDK-2110 | | IDK-2112 | IDK-2115 | IDK-2117 | IDK-2119 | IDK-2121 |
|-----------------------|------------------|------------------|------------------|------------------|------------------|--------------------|--------------------|-------------------|
| Size | 8.4" | 10.4" | 10.4" | 12.1" | 15" | 17" | 19" | 21.5" |
| Resolution | 800 x 600 (SVGA) | 800 x 600 (SVGA) | 1024 x 768 (XGA) | 800 x 600 (SVGA) | 1024 x 768(XGA) | 1280 x 1024 (SXGA) | 1280 x 1024 (SXGA) | 1920 x 1080 (FHD) |
| Brightness (cd/m²) | 1200 | 1200 | 1300 | 1200 | 1200 | 1200 | 1200 | 1200 |
| Viewing Angle (H/V°) | 160/140 | 160/130 | 170/170 | 160/140 | 160/140 | 170/160 | 170/160 | 178/178 |
| Contrast Ratio | 600:1 | 500:1 | 700:1 | 700:1 | 700:1 | 1000:1 | 1000:1 | 5000:1 |
| Touchscreen | 4-Wire Resistive | 4-Wire Resistive | 4-Wire Resistive | 5-Wire Resistive | 5-Wire Resistive | 5-Wire Resistive | 5-Wire Resistive | 5-Wire Resistive |
| Signal Interface | LVDS | LVDS | LVDS | LVDS | LVDS | 2 Channel LVDS | 2 Channel LVDS | 2 Channel LVDS |
| Backlight Life (hrs) | 50,000 | 50,000 | 70,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 |
| Durability (touches) | 1 millions | 1 million | 1 million | 10 million | 10 million | 10 million | 10 million | 10 million |
| Operating Temperature | -20 ~ 70°C | -10~60°C | -10~60°C | -20 ~ 70°C | -20 ~ 70°C | 0 ~ 50°C | 0 ~ 50°C | 0 ~ 55°C |

Slim Open Frame/Panel Mount Monitors IDS-3000 Series

| | IDS-3106/ IDS-3206 | IDS-3110/ IDS-3210 | IDS-3112/ IDS-3212 | IDS-3115/ IDS-3215 | IDS-3117/ IDS-3217 | IDS-3118W | IDS-3119/ IDS-3219 | IDS-3121W/ IDS-3221 |
|-----------------------|---|---|---|-------------------------------|-----------------------|-------------------------------|-----------------------|-------------------------------|
| Size | 6.5" | 10.4" | 12.1" | 15" | 17" | 18.5" | 19" | 21.5" |
| Resolution | 640 x 480, VGA | 800 x 600, SVGA and 1024 x 768, XGA | 800 x 600, SVGA and 1024 x 768, XGA | 1024 x 768, XGA | 1280 x 1024, SXGA | 1366 x 768, HD | 1280 x 1024, SXGA | 1920 x 1080, FHD |
| Brightness (cd/m²) | 800 | 400/500 | 450/600 | 400/500 1200 | 350 | 300 | 350 | 250 |
| Viewing Angle(H/V°) | 160/140 | 160/140 | 160/140 | 160/140 | 170/160 | 170/160 | 170/160 | 178/178 |
| Contrast Ratio | 600 : 1 | 700 : 1 | 700 : 1 | 700 : 1 | 800 : 1 | 1000:1 | 1000:1 | 1000:1 |
| Touchscreen | 4-Wire Resistive | 5-wire resistive and P-cap | 5-Wire Resistive | 5-wire resistive and P-cap | 5-Wire Resistive | 5-wire resistive and P-cap | 5-Wire Resistive | 5-wire resistive and P-cap |
| Backlight Life (hrs) | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 |
| Durability | 1 million touches | 10/50 million touches | 10 million touches | 10/50 million touches | 10 million touches | 10/50 million touches | 10 million touches | 10/50 million touches |
| Operating Temperature | 0 ~ 50° C | - 20 ~ 60° C | - 20 ~ 60° C | - 20 ~ 60° C | - 20 ~ 60° C | 0 ~ 55° C | 0 ~ 45° C | 0 ~ 45° C |
| I/O Ports | VGA x 1; DVI x 1; 12 VDC Jack x 1; USB x 1 | VGA x 1; DVI x 1; 12 VDC Jack x 1; USB x 1; RS-232 x 1 | | | | | | |
| OSD | Keys: Power on/off, Menu/Enter, Left/Up, Right/Down, Exit/Auto, Source Menu Functions: Brightness, Contrast, Screen Setting, Color Temp, OSD Language, VGA/DVI, Reset, Auto Adjust | | | | | | | |

IP65 Monitors IDS-3300 Series

| | IDS-3315 | IDS-3319 | IDS-3321W |
|---------------------------------|---|--------------------|----------------------------|
| Size | 15" | 19" | 21.5" |
| Resolution | 1024 x 768, XGA | 1280 x 1024, SXGA | 1920 x 1080, FHD |
| Brightness (cd/m ²) | 500 | 350 | 250 |
| Viewing Angle (H/V°) | 160/140 | 170/160 | 178/178 |
| Contrast Ratio | 2500:1 | 1000:1 | 1000:1 |
| Touchscreen | 5-wire resistive and P-cap | 5-Wire Resistive | 5-wire resistive and P-cap |
| Backlight Life (hrs) | 50,000 | 50,000 | 50,000 |
| Durability | 10/50 million touches | 10 million touches | 10/50 million touches |
| Operating Temperature | - 20 ~ 60° C | 0 ~ 45° C | 0 ~ 45° C |
| I/O Ports | VGA x 1; DVI x 1; HDMI x 1 12VDC Jack x 1; USB x 1; RS-232 x 1 | | |

Configurable Industrial Monitors IDS31 Series

| | IDS31-070W | IDS31-104 | IDS31-156W | IDS31-185W | IDS31-190 | IDS31-215W | IDS31-230W | IDS31-320W |
|---------------------------------|-------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|--------------------------------|
| Size | 7" Wide | 10.4" | 15.6" Wide | 18.5" Wide | 19" | 21.5" Wide | 23" Wide 32" | 32" Wide |
| Resolution | 800 x 480 | 800 x 600 | 1366 x 768 | 1366 x 768 | 1280 x 1024 | 1920 x 1080 | 1920 x 1080 | 1920 x 1080 |
| Brightness (cd/m ²) | 400 | 230 | 300 | 300 | 350 | 250 | 300 | 350 |
| Viewing Angle (H/V°) | 80,80,60,80 | 60,60,55,45 | 85,85,80,80 | 85,85,80,80 | 85,85,80,80 | 89,89,89,89 | 89,89,89,89 | 89,89,89,89 |
| Contrast Ratio | 500 : 1 | 500 : 1 | 500 : 1 | 1000 : 1 | 1000 : 1 | 5000 : 1 | 1000 : 1 | 1000 : 1 |
| Touchscreen | 5 wire AR | 5 wire AR | Projected Capacitive | Projected Capacitive | Projected Capacitive | Projected Capacitive | Projected Capacitive | Surface / Projected Capacitive |
| Backlight Life (hrs) | 50,000 | 30,000 | 50,000 | 50,000 | 50,000 | 30,000 | 30,000 | 50,000 |
| Operating Temperature | 0 ~ +50° C | 0 ~ +50° C | 0 ~ +50° C | 0 ~ +50° C | 0 ~ +50° C | 0 ~ +50° C | 0 ~ +50° C | 0 ~ +50° C |

Digital Signage Displays DSD-3000/5000 Series

| | DSD-3032 | DSD-3042 | DSD-3055 | DSD-5028 | DSD-5038 |
|---------------------------------|-----------------------|-----------------------|-----------------------|------------|------------|
| Size | 32" | 42" | 55" | 28" | 38" |
| Resolution | 1920 x 1080 | 1920 x 1080 | 1920 x 1080 | 1920 x 358 | 1920 x 538 |
| Brightness (cd/m ²) | 350 | 500 | 450 | 700 | 800 |
| Viewing Angle (H/V°) | 178/178 | 178/178 | 178/178 | 178/178 | 176/176 |
| Contrast Ratio | 3000:1 | 4000:1 | 4000:1 | 3000:1 | 4000:1 |
| Touchscreen | Optical Touch | Optical Touch | Optical Touch | N/A | N/A |
| Signal Interface | HDMI/VGA/ DisplayPort | HDMI/VGA/ DisplayPort | HDMI/VGA/ DisplayPort | VGA/DVI | VGA/DVI |
| Backlight Life (hrs) | 50,000 | 50,000 | 50,000 | 50,000 | 50,000 |
| Durability | 10 million touches | 10 million touches | 10 million touches | N/A | N/A |
| Operating Temperature | 5 ~ 45° C | 5 ~ 45° C | 5 ~ 45° C | 0 ~ 45° C | 0 ~ 45° C |

Ultra Thin Proflat Monitors IDP31 Series

| | IDP31-150 | IDP31-215W |
|---------------------------------|--------------------|--------------------|
| Size | 15" | 21.5" Wide |
| Resolution | 1024 x 768 | 1920 x 1080 |
| Brightness (cd/m ²) | 500 | 250 |
| Viewing Angle (H/V°) | 160 / 140 | 178 / 178 |
| Contrast Ratio | 2500:1 | 1000 : 1 |
| Touchscreen | P-cap | P-cap |
| Backlight Life (hrs) | 50,000 | 50,000 |
| Durability | 50 million touches | 50 million touches |
| Operating Temperature | -20 ~ 60 | 0 ~ 45 |

Curved Display CRV Series

| | CRV-430WP | CRV-430JP |
|---------------------------------|--|------------|
| Size | 43" C type | 43" J type |
| Resolution | 3840 x 2160 UHD | |
| Brightness (cd/m ²) | 450 | |
| Contrast Ratio | 1100:1 (14ms) | |
| Curved Radius | 1500 | 800 |
| Touchscreen | Multi-touch PCT(10 touches) | |
| Cover Glass | 4mm | |
| Operating Temperature | 0 ~ 50° C | |
| I/O Ports | HDMI 1.4 (2 ports), HDMI 2.0 (2 ports), DisplayPort, VGA | |

Your Industrial Displays Expert



Industrial Grade and Quality

Advantech provides industrial grade display solutions for industrial usages which require more rugged specification and high quality.



Extended Longevity and Warranty

We offer 2 years of product longevity and warranty. Extended warranty between 3-5 years is also available.



Global Capacity and Local Service

Advantech provides display systems globally with three manufacturing centers in Taiwan, China and USA and branch offices in 23 countries to better service customers.

Regional Service & Customization Centers

China | Kunshan
86-512-5777-5666

Taiwan | Taipei
886-2-2792-7818

Netherlands | Eindhoven
31-40-267-7000

Poland | Warsaw
00800-2426-8080

USA | Milpitas, CA
1-408-519-3898

Worldwide Offices

Greater China

China
Toll Free 800-810-0345
Beijing 86-10-6298-4346
Shanghai 86-21-3632-1616
Shenzhen 86-755-8212-4222
Chengdu 86-28-8545-0198
Hong Kong 852-2720-5118

Taiwan
Toll Free 0800-777-111
Taipei & IoT Campus 886-2-2792-7818
Taichung 886-4-2329-0371
Kaohsiung 886-7-229-3600

Middle East and Africa

Israel 072-2410527

Asia

Japan
Toll Free 0800-500-1055
Tokyo 81-3-6802-1021
Osaka 81-6-6267-1887
Nagoya 81-0800-500-1055

Korea
Toll Free 080-363-9494
Seoul 82-2-3663-9494

Singapore
Singapore 65-6442-1000

Malaysia
Kuala Lumpur 60-3-7725-4188
Penang 60-4-537-9188

Thailand
Bangkok 66-02-2488306-9

India
Bangalore 91-80-2545-0206
Pune 91-20-3948-2075

Indonesia
Jakarta 62-21-751-1939

Australia
Toll Free 1300-308-531
Melbourne 61-3-9797-0100

Europe

Germany
Toll Free 00800-2426-8080/81
Munich 49-89-12599-0
Düsseldorf 49-2103-97-855-0

France
Paris 33-1-4119-4666

Italy
Milano 39-02-9544-961

Benelux & Nordics
Breda 31-76-523-3100

UK
Newcastle 44-0-191-262-4844
London 44-0-870-493-1433

Poland
Warsaw 48-22-31-51-100

Russia
Moscow 8-800-555-01-50
St. Petersburg 8-800-555-81-20

Czech Republic
Ústí nad Orlicí 420-465-521-020

Ireland
Oranmore 353-91-792444

Americas

North America
Toll Free 1-888-576-9668
Cincinnati 1-513-742-8895
Milpitas 1-408-519-3898
Irvine 1-949-420-2500
Ottawa 1-815-434-8731

Brazil
Toll Free 0800-770-5355
São Paulo 55-11-5592-5355

Mexico
Toll Free 1-800-467-2415
Mexico City 52-55-6275-2727

ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before ordering. This guide is intended for reference purposes only.

All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies.

© Advantech Co., Ltd. 2018

8600000408