W15L100-EHA4

15.6" Multi-Touch Panel Mount Display



KEY FEATURES

- 15.6", 1920 x 1080 Multi-Touch Panel Mount Display
- VGA and HDMI input
- Panel Mount
- VESA mount
- PCAP touch




SPECIFICATIONS

Touch / Glass Projected Capacitive Multi Touch Screen Resolution 1920x1080				
Size 15.6 inches Contrast Ratio Bool:	Display			
Panel Brightness 400.0 nits Display Color 262K Colors	Touch / Glass	Projected Capacitive Multi Touch Screen	Resolution	1920x1080
Second	Size	15.6 inches	Contrast Ratio	800:1
Environment Operating Humidity 10% to 90% RH, Non-Condensing	Panel Brightness	400.0 nits	Display Color	262K Colors
Operating Humidity 10% to 90% RH, Non-Condensing Temperature	View Angles	85,85,85,85	Active Area	344.16x193.59 mm
Temperature IP rating Front IP65 Certification Certification CE, FCC IO Ports USB Port 1 x USB for Touch Screen 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) 1 x	Environment			
Température Certification CE, FCC IO Ports USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) 1 x DVI (Optional) Audio 2 x Speaker (Optional) Mechanical Dimension 388 x 260 x 62.5 mm Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100-240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Operating Humidity	10% to 90% RH, Non-Condensing		0°C to 50°C
Certification CE, FCC IO Ports USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI	Storage Temperature	-10°C to 60°C	IP rating	Front IP65
USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) 2 x Speaker (Optional) 2 x Speaker (Optional) 2 x Speaker (Optional) 4 x DVI (Optional) 4 x DVI (Optional) 5 x DVI (Optional) 5 x DVI (Optional) 6 x DVI (Optional) 7 x DVI (Optional) 7 x DVI (Optional) 7 x DVI (Optional) 8 x 260 x 62.5 mm 9 x DVI (Optional System Fanless Design 8 x DVI (Optional System Fanless Design 9 x DVI (Optional System Fanless	Certification			
USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) Audio Audio line in (3.5mm) (Optional) Mechanical Dimension 388 x 260 x 62.5 mm Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Certification	CE, FCC		
Audio Audio line in (3.5mm) (Optional) 2 x Speaker (Optional) Mechanical Dimension 388 x 260 x 62.5 mm Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	IO Ports			
Mechanical Dimension 388 x 260 x 62.5 mm Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	USB Port	1 x USB for Touch Screen	Video	1 x HDMI (Optional)
Dimension 388 x 260 x 62.5 mm Mounting VESA Mount/ Panel Mount Enclosure Metal Housing with Aluminum Bezel Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Audio			
Accessory Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Mechanical			
Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Dimension	388 x 260 x 62.5 mm	Mounting	VESA Mount/ Panel Mount
Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 24V DC in (optional)	Enclosure	Metal Housing with Aluminum Bezel	Cooling System	Fanless Design
1 x HDMl cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in 24V DC in (optional)	Accessory			
Power Rating 12V DC in 24V DC in (optional)	Accessory	1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual	Optional Accessory	Remote Controller (Optional, Varies by product)
24V DC in (optional)	Power			
Control	Power Rating			
	Control			

Button

5 Keys: - , + , Power , Esc , Enter

DIMENSIONS UNIT:MM

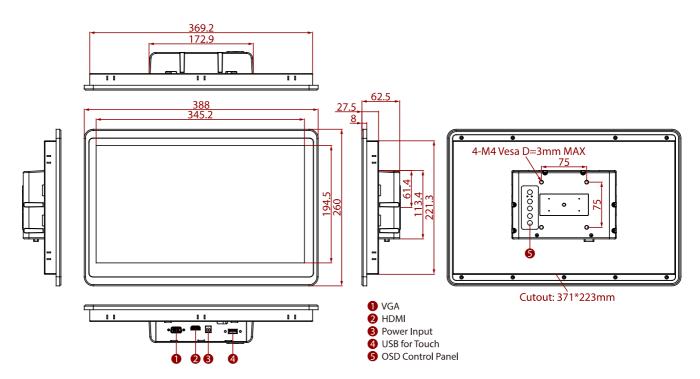

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.