# W15L100-PTA3

# 15.6" Multi-Touch Chassis Display



## **KEY FEATURES**

- 15.6" 1920 x 1080 Resolution
- VGA input and HDMI input
- Stylish and elegant design
- Front IP65



# **SPECIFICATIONS**


**Display** 

Resolution         1920x1080         Size         15.6 inches           Contrast Ratio         800:1         Panel Brightness         400.0 nits           Display Color         262K Colors         View Angles         85.85,85,85         85           Active Area         344.16x193.59 mm         Touch / Glass         Projected Capacitive Multi Touch Screen Anti-glare Film (Optional)           Environment           Operating Humidity         10% to 90% RH, Non-Condensing         Operating Temperature         0°C to 50°C           Storage         -10°C to 60°C           Temperature         Certification           Certification         CE, FCC           IOPorts           USB Port         1 x USB for Touch Screen         Video         1 x VGA           Audio         1 x Audio Line In 2 x Speaker (Optional)           Mechanical           Dimension         387.8 x 232.9 x 40 mm         Weight         1.7 kg           Mounting         VESA Mount         Enclosure         Plastic           Cooling System         Fanless Design         Accessory         1 x VGA cable 1 x HDMI cable 1 x HDMI cable 1 x HDMI cable 1 x HDMI cable 2 x Secure 2 x VC ca				
Display Color 262K Colors View Angles 85,85,85,85 Active Area 344.16x193.59 mm Touch / Glass Projected Capacitive Multi Touch Screen Anti-glare Film (Optional)  Environment  Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature -10°C to 60°C Temperature  Certification CE, FCC  IO Ports  USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional)  Audio 1 x Audio Line In 2 x Speaker (Optional)  Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 100-240 VAC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power  Power Rating 12V DC in	Resolution	1920x1080	Size	15.6 inches
Active Area     344.16x193.59 mm     Touch / Glass     Projected Capacitive Multi Touch Screen Anti-glare Film (Optional)       Environment     Operating Humidity     10% to 90% RH, Non-Condensing     Operating Permeture     0°C to 50°C       Storage Temperature     -10°C to 60°C     -10°C to 50°C       Certification       Certification       USB Port       1 x USB for Touch Screen     Video     1 x VGA 1 x HDMI (Optional)       Audio     1 x Audio Line In 2 x Speaker (Optional)       Mechanical       Dimension     387.8 x 232.9 x 40 mm     Weight     1.7 kg       Mounting     VESA Mount     Enclosure     Plastic       Cooling System     Fanless Design       Accessory       1 x VGA cable 100-240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)       Power Rating       Power Rating       Power Rating       Power Rating       Late Of State of Color Adapter Power Rating       Power Rating       Power Rating       Power Rating       Late Of State of Color Adapter Power Rating       Power Rating       Power Rating	Contrast Ratio	800:1	Panel Brightness	400.0 nits
Environment  Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature -10°C to 60°C  Storage Temperature -10°C to 60°C  Certification CE, FCC  IO Ports  USB Port 1x USB for Touch Screen Video 1x HDMI (Optional)  Audio 1x Audio Line In 2x Speaker (Optional)  Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  Accessory  1 x VGA cable 1x HDMI cable 100-240 VA Ct to DC Adapter Poover Cord Manual VID Accessory Varies by product)  Power Rating 12V DC in	Display Color	262K Colors	View Angles	85,85,85,85
Operating Humidity   10% to 90% RH, Non-Condensing   Operating Temperature   10°C to 60°C	Active Area	344.16x193.59 mm	Touch / Glass	Projected Capacitive Multi Touch Screen Anti-glare Film (Optional)
Storage Temperature	Environment			
Temperature  Certification  CE, FCC  IO Ports  USB Port 1 x USB for Touch Screen Video 1 x HDMI (Optional)  Audio 1 x Audio Line In 2 x Speaker (Optional)  Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 1000-240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power Rating 12V DC in	Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Certification CE, FCC  IO Ports  USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional)  Audio 1 x Audio Line In 2 x Speaker (Optional)  Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 1000-240V AC to DC Adapter Power Corrd Manual VESA screws(Varies by product)  Power Rating 12V DC in		-10°C to 60°C		
IO Ports USB Port 1x USB for Touch Screen Video 1x VGA 1x HDMI (Optional) Audio 1x Audio Line In 2x Speaker (Optional)  Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  1x VGA cable 1x HDMI cable 100-240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power Rating 12V DC in	Certification			
USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional)  Audio 1 x Audio Line In 2 x Speaker (Optional)  Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  1 x VGA cable 1.7 kg  Mechanical  Power Cord Manual VESA screws(Varies by product)	Certification	CE, FCC		
Audio 1 x Audio Line In 2 x Speaker (Optional)  Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power Rating 12V DC in	IO Ports			
Mechanical  Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 100~240 V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power Rating 12V DC in	USB Port	1 x USB for Touch Screen	Video	
Dimension 387.8 x 232.9 x 40 mm Weight 1.7 kg  Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power Rating 12V DC in	Audio			
Mounting VESA Mount Enclosure Plastic  Cooling System Fanless Design  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power  Power Rating 12V DC in	Mechanical			
Cooling System Fanless Design  Accessory  Accessory  1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power  Power Rating  12V DC in	Dimension	387.8 x 232.9 x 40 mm	Weight	1.7 kg
Accessory  1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power Rating  12V DC in	Mounting	VESA Mount	Enclosure	Plastic
Accessory  1 x VGA cable 1 x HDMl cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power  12V DC in	Cooling System	Fanless Design		
1 x HDMl cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)  Power  12V DC in	Accessory			
Power Rating 12V DC in	Accessory	1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual		
	Power			
	Power Rating			

Control

## **DIMENSIONS**

UNIT:MM

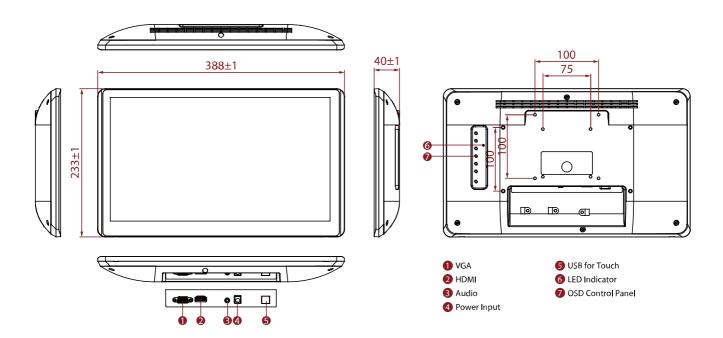

## NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.